

A measurement of the differential cross section for the two-body photodisintegration of ^3He at $\theta^{\text{LAB}} = 90^\circ$ using tagged photons in the energy range 14–31 MeV

M. Karlsson,^{1,*} J.-O. Adler,¹ L.E.M. Andersson,¹ V. Avdeichikov,¹ B.L. Berman,² M.J. Boland,^{3,†} W.J. Briscoe,² J. Brudvik,³ J.R. Calarco,⁴ G. Feldman,² K.G. Fissum,^{1,‡} K. Hansen,³ D.L. Hornidge,^{5,§} L. Isaksson,^{1,¶} N.R. Kolb,⁵ A.A. Kotov,^{6,**} P. Lilja,^{1,¶} M. Lundin,^{1,¶} B. Nilsson,^{1,¶} D. Nilsson,¹ G.V. O’Rielly,^{2,††} G.E. Petrov,⁶ B. Schröder,¹ I.I. Strakovsky,² and L.A. Vaishnane⁶

(The MAX-lab Nuclear Physics Working Group)

¹*Department of Physics, Lund University, SE-221 00 Lund, Sweden*

²*Department of Physics, The George Washington University, Washington DC, 20052, USA*

³*MAX-lab, Lund University, SE-221 00 Lund, Sweden*

⁴*Department of Physics, University of New Hampshire, Durham, NH 03824, USA*

⁵*Department of Physics and Engineering Physics,*

University of Saskatchewan, Saskatoon SK, S7N 5E2 Canada

⁶*Petersburg Nuclear Physics Institute, 188350 Gatchina, Russia*

(Dated: September 2, 2009)

The two-body photodisintegration of ^3He has been investigated using tagged photons with energies from 14 – 31 MeV at MAX-lab in Lund, Sweden. The two-body breakup channel was unambiguously identified by the (nonsimultaneous) detection of both protons and deuterons. This approach was made feasible by the over-determined kinematic situation afforded by the tagged-photon technique. Proton- and deuteron-energy spectra were measured using four silicon surface-barrier detector telescopes located at a laboratory angle of 90° with respect to the incident photon-beam direction. Average statistical and systematic uncertainties of 5.7% and 6.6% in the differential cross section were obtained for 11 photon-energy bins with an average width of 1.2 MeV. The results are compared to previous experimental data measured at comparable photon energies as well as to the results of two recent Faddeev calculations which employ realistic potential models and take into account three-nucleon forces and final-state interactions. Both the accuracy and precision of the present data are improved over those obtained in the previous measurements. The data are in good agreement with most of the previous results, and favor the inclusion of three-nucleon forces in the calculations.

PACS numbers: 21.45.-v, 21.45.Ff, 25.10.+s, 25.20.-x, 27.10.+h

I. INTRODUCTION

With only three nucleons, ^3He has long attracted attention as one of the most straightforward testing grounds for nuclear theories, primarily because numerically accurate solutions to this quantum-mechanical three-body problem exist. Further, when low-energy photons are used as a probe, these calculations can be carried out in a non-relativistic framework and with a well-understood initial-state interaction [1].

Photodisintegration experiments on ^3He have been performed for a long time, and over the years several

experiments at low photon energies have been reported [1, 2, 3, 4, 5, 6, 7] (see for example Fig. 1 in Ref. [6] where the previous results are presented in the c.m. system and our Fig. 12 where the previous results are presented in the lab system. At these energies, the differences are small – on the order of 1–2%). The general trend in the results is clear: the differential cross-section data obtained at a lab angle of 90° as a function of photon energy (E_γ) rises sharply from the reaction threshold at 5.49 MeV to a peak value which occurs at around 11.5 MeV. Above 12 MeV, the cross section decreases smoothly. Beyond the general trend, a clear question arises regarding the normalizations of the various data sets. Around 12 MeV, the measured cross-section data range from 90 to 120 $\mu\text{b}/\text{sr}$. At higher energies, fewer data sets exist, but they appear to converge. If the previous measurements are investigated in more detail, another feature appears – the cross section determined in experiments performed with untagged bremsstrahlung photons [1, 2, 4] tends to be smaller than the cross section determined in either radiative-capture experiments [6] or electrodisintegration experiments [3, 5].

Recent advances in theoretical techniques and computational capabilities have made it possible to perform complete Faddeev calculations for the $A = 3$ system

*Present address: Nordea Bank Danmark A/S, Christiansbro, DK-0900 Copenhagen, Denmark

†Present address: Australian Synchrotron, Clayton, Victoria 3168, Australia

‡Corresponding author; kevin.fissum@nuclear.lu.se

§Present address: Department of Physics, Mount Allison University, Sackville NB, E4L 1E6 Canada

¶Present address: MAX-lab, Lund University, SE-221 00 Lund, Sweden

**deceased

††Present address: Department of Physics, University of Massachusetts Dartmouth, North Dartmouth MA 02747, USA

[8, 9]. These calculations use modern, realistic potentials taking into account three-nucleon forces (3NF) as well as final-state interactions (FSI). In particular, the calculations below $E_\gamma = 20$ MeV are sensitive to the choice of nucleon-nucleon (NN) potential, 3NF effects, and Coulomb effects. However, the quality of the existing data has made comparisons between theoretical predictions and experimental results difficult. The need for more accurate and precise measurements is clear – especially below 20 MeV where sensitivity is high and experimental discrepancies are most pronounced.

A recent major improvement in experimental technique has been the development of accelerators capable of providing almost continuous electron beams which have facilitated the method of photon tagging. With this method, it is possible to directly measure both the energy of the photon as well as the total number of photons incident upon the target. The tagged-photon technique also facilitates the discrimination between two-body and three-body photodisintegration via kinematic overdetermination. This means that in a modern tagged-photon experiment on ^3He , two-body photodisintegration events can be identified by the detection of the proton only, substantially less challenging than the detection of a deuteron.

In this article, we present a comprehensive new data set for the photodisintegration of ^3He near threshold obtained using tagged photons with energies from 14 – 31 MeV. We compare our data with previous measurements as well as modern calculations [8, 9] which employ the Faddeev technique and include final-state interactions. A detailed description of the experiment is presented in Ref. [10].

II. EXPERIMENT

The experiment was performed at the tagged-photon facility [11] located at MAX-lab [12], in Lund, Sweden. A pulse-stretched electron beam with a nominal energy of 93 MeV, a nominal current of 20 nA, and a nominal duty factor of 75% was used to produce quasi-monochromatic photons via the bremsstrahlung-tagging technique [13]. A diagram of the experimental layout is shown in Fig. 1.

A. Photon beam

A 0.1% radiation-length Al radiator was used to generate a bremsstrahlung photon beam from the electron beam. Non-radiating electrons passed to a well-shielded beam dump (see Fig. 1). Post-bremsstrahlung electrons were momentum-analyzed using a magnetic spectrometer equipped with a 64-counter focal-plane scintillator array. The nominal photon-energy resolution of 270 keV resulted almost entirely from the 6.2 mm width of a single focal-plane counter.

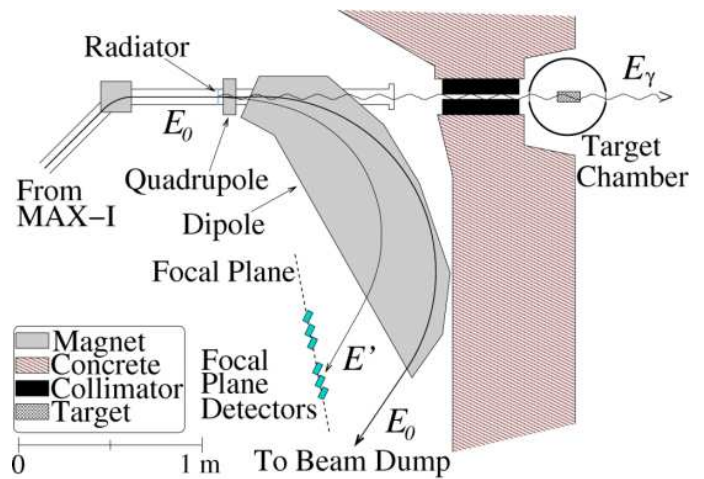


FIG. 1: (Color online) An overview of the experimental layout at the time of the experiment. The beam passed through a radiator generating bremsstrahlung. Non-interacting electrons passed to a well-shielded beam dump. Recoil electrons were momentum-analyzed using a magnetic tagging spectrometer equipped with a 64-counter focal-plane scintillator array. The resulting tagged-photon beam was collimated before it entered the target chamber. Reaction products were detected using 4 silicon-detector telescopes mounted at 90° to the direction of the photon beam (see Fig. 2). See text for further details.

The scintillators were mounted in two modules consisting of 32 non-overlapping counters, and the tagged photon-energy range (14 – 31 MeV) was selected by sliding the array to the appropriate position along the focal plane of the spectrometer. The analog signals from each of the focal-plane detectors were individually discriminated and then passed to scalers and TDCs. The average single-counter rate during these measurements was 2 MHz per MeV.

The size of the photon beam was defined by a tapered tungsten-alloy primary collimator of 12.3 mm diameter. The primary collimator was followed by a dipole magnet and a post-collimator which were used to remove any charged particles produced in the primary collimator. The position of the photon beam both upstream and downstream of the target location was determined by irradiating Polaroid film after every adjustment of the electron beam. In this manner, the beam spot was determined to be 18.6 ± 0.4 mm in diameter throughout the target cell. As a uniform distribution of events across the detectors was observed throughout the experiment, the dislocation of the symmetry axis of the target chamber with respect to the direction of the photon beam was determined to be less than 2 mm (see Sect. III D 3).

The tagging efficiency [11] is the ratio of the number of tagged photons which struck the target to the number of recoil electrons which were registered by the associated focal-plane counter. It was measured absolutely (using a 100% efficient lead/scintillating-fiber photon de-

tector) on a frequent basis during the experiment. These measurements required a very low intensity photon beam to avoid pileup in the photon detector, and were corrected for accelerator-associated (such as scattering of recoil electrons between focal-plane detectors), radiator-associated (such as multiple Coulomb and Möller scattering) and room-associated (such as activation) sources of background. Tagging efficiency was typically 18%, resulting from the strict collimation of the photon beam. Uncertainty in the tagging efficiency had both scale and rate-dependent contributions. The scale contributions included differences in the duty factor between tagging efficiency and production runs (2%), time-dependent variations (2%), and a focal-plane detector live time correction (3%). The rate-dependent component arose from the sensitivity of the tagging efficiency to background in the focal-plane detectors. This background arose from the post-radiator, enlarged, unconverted primary electron beam interacting with the pole surfaces of the tagging spectrometer. Focal-plane detectors corresponding to the lower photon energies were located closer to this electron beam, and thus suffered a much higher rate of background events. The corresponding average uncertainty associated with the rate-dependent correction was 5%.

B. Target

The target cell is presented in Fig. 2. It was manufactured from a single block of stainless steel with dimensions $70 \times 70 \times 100 \text{ mm}^3$. One large circular hole was milled through the block creating the entrance and exit ports for the photon beam. Perpendicular to this hole, two smaller holes were milled through the block, creating four exit ports for the reaction products. These four exit ports were “aimed” at the center of the gas volume. The target cell was sufficiently robust that it also served as the base for mounting the detector systems installed at each detector port.

Thin havar foils were used to seal all of the cell ports and thus contain the gaseous ^3He that served as the target. The beam entrance and exit windows were $12.5 \mu\text{m}$ thick. During the experiment, the detector-port windows were reduced to $5 \mu\text{m}$ in thickness. The foils were mounted in position by clamping them between two copper gaskets together with an indium seal. This resulted in a very low rate of target-gas leakage. The target cell was placed in a vacuum chamber maintained at 5×10^{-3} torr. This target chamber was placed as close as possible (the entrance window to the chamber was approximately 10 cm downstream of the exit aperture of the photon-beam collimator) to the photon-beam collimator to ensure that the photon-beam envelope was completely subtended by the target-gas volume.

The target-cell filling system consisted of a vacuum pump, a precision pressure gauge, and a gas cylinder. The cell was filled with 99.96% pure ^3He gas to a nom-

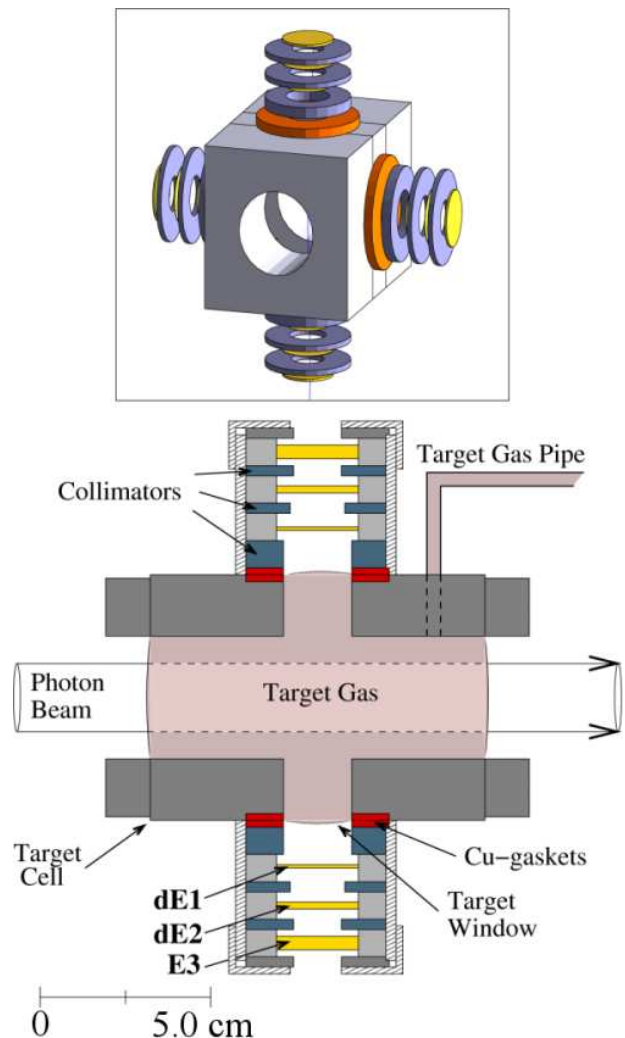


FIG. 2: (Color online) The top panel shows a three-dimensional representation of the target/detector setup. The bottom panel shows a schematic of the target cell. Two of the four detector telescopes are shown together with the photon-beam envelope and the target-gas volume.

inal pressure of 2 bar. The target pressure was continuously monitored throughout the experiment. The pressure change over the course of a two-week run period was typically 2% so that additional filling of the target cell during a run period was unnecessary. The effective target pressure was taken to be the pressure in the middle of the run period.

The target density was determined based upon the assumption that the target gas behaved as an ideal gas. The temperature used in determining the target thickness was taken to be the room temperature measured close to the target chamber. Typical values were about 25.5°C with a systematic uncertainty of less than 0.5%. The variation in the target pressure with time together with the accuracy of the pressure gauge used to monitor the system resulted in a total systematic uncertainty in

the target density of 2%.

Empty-target measurements were performed with the target-cell pressure at 0.1 torr. It was determined that this background contribution to the data was negligible.

C. Detector telescopes

Protons and deuterons were detected in four detector telescopes. Each telescope consisted of three totally depleted silicon surface barrier detectors mounted in a ΔE – ΔE –E (labeled dE1–dE2–E3 in Fig. 2) configuration. Silicon detectors have essentially 100% intrinsic detection efficiency for charged particles. For each of the the dE1 detectors, two detector thicknesses were used: 25 μm and 50 μm . The dE2 and E3 detectors were 150 μm and 1000 μm thick, respectively. This arrangement, in which the dE2 detector could serve as either a ΔE or E detector, increased the energy range over which particle identification (PID) could be performed.

A collimator was located in front of each detector element. For protons or deuterons originating from an interaction at the center of the target cell, these collimators defined the point-source solid angle subtended by the detectors. These point-source solid angles were 107, 68, and 38 msr for the dE1, dE2, and E3 detectors respectively. For points of interaction further away from the center of the target cell, the copper gaskets as well as the target cell itself contributed, creating a complex geometric acceptance. The determination of this geometric acceptance was performed using a GEANT4 [14] Monte-Carlo simulation, which accounted for the uniform photon-beam profile of 18.6 mm diameter, the 6 cm extended-target geometry, and the collimator arrangement in front of each detector element.

D. Electronics and data acquisition

An overview of the electronics is shown in Fig. 3.

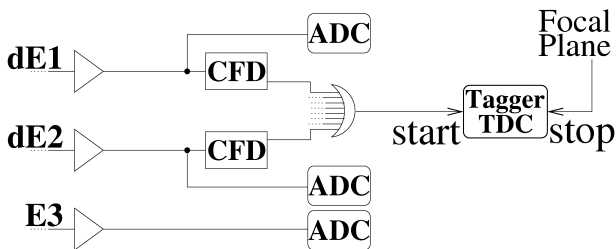


FIG. 3: Schematic diagram of the electronics used for a single telescope together with the focal plane.

The analog signal from each silicon detector was sent to a preamplifier. The preamplifiers were located approximately 30 cm from the target chamber. The output signals from the preamplifiers were then passed to

timing-filter amplifiers (TFA). The output from a given TFA was symmetrically divided for the dE1 and dE2 detectors, and passed both to an analog-to-digital converter (ADC) and a constant-fraction discriminator (CFD). The CFD determined the timing of the dE1 and dE2 event triggers. Output signals from the CFDs were also used to stop TDCs. The TFA output for the E3 detector was simply passed to an ADC. For the thick dE1, dE2, and E3 detectors, the ADC used was charge-integrating. For the thin dE1 detectors, a spectroscopy amplifier and a peak-sensing ADC were used together with modified preamplifiers to allow for reasonable particle identification when the deposited energy was relatively small and the noise in the detectors was relatively large.

The OR of the CFD signals from the eight ΔE (4 dE1 and 4 dE2) detectors was used to generate the trigger signal. The trigger signal was used to start the focal-plane TDCs, gate the ADCs, and start TDCs connected to the ΔE detectors to determine the relative timing between them. This was necessary to account for the different charge-collection times of the different thickness silicon detectors. Note that the dE2 detectors had the best time resolution so that they were used to determine the overall trigger timing.

The trigger signal was also passed to a VME front-end computer to initiate the data readout from the CAMAC crates via a branch driver and an inhouse software toolkit. Resulting events were defined and analyzed offline using the ROOT toolkit [15].

III. DATA ANALYSIS

A. Calibration of the silicon detectors

The calibration of the dE1 and dE2 detectors was straightforward as the thicknesses of the detectors were specified to within 2%, equivalent to the precision of the GEANT4 energy-loss corrections. Thus, deuterons (or protons) had a specific energy required for a particle to barely pass through a detector of a given thickness (the “punch-through” energy). ADC spectra were compared to GEANT4-simulated spectra to determine the punch-through energy (see Fig. 4).

For each of the dE1 and dE2 detectors, the correspondence (hereafter referred to as the “gain”) between the simulated punch-through energy (in MeV) and the measured punch-through energy (in ADC channels) was given by

$$g = \frac{E_{\text{punch-through}}}{ADC_{\text{punch-through}}}, \quad (1)$$

where $E_{\text{punch-through}}$ was the punch-through energy from the simulated spectrum and $ADC_{\text{punch-through}}$ was the corresponding punch-through position in the ADC spectrum. Each detector thus yielded two punch-through calibration points: one for protons and one for deuterons.

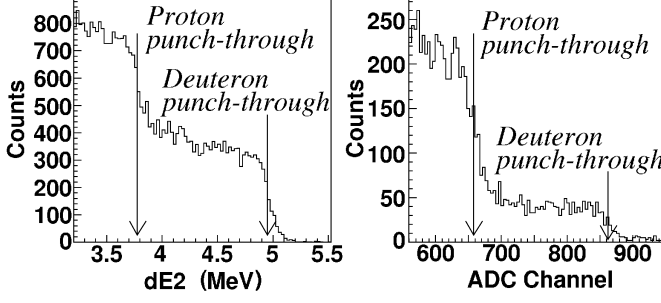


FIG. 4: An illustration of the energy-calibration procedure for the dE2 detector. The punch-through energies are indicated by the arrows. The left panel shows the simulated energy spectrum while the right panel shows the corresponding measured ADC spectrum. See text for details.

The resulting gains determined from the two particle types were equal to better than 2%. The final uncertainty in the gain factors was dominated by the uncertainty in detector thicknesses and was estimated to be 3%.

The calibration scheme for the dE1 and dE2 detectors was not applicable to the E3 (1000 μm) detectors. This was because the energy deposited for the punch-through events was large enough to saturate the amplifiers. Instead, coincidences between dE2-deuterons and E3-protons in opposed telescopes were examined.

For a given E3-proton or dE2-deuteron, the detected energy $T'_{p,d}$ was given by $T'_{p,d} = T_{p,d} - L_{p,d}$, where $T_{p,d}$ was the kinetic energy of the E3-proton or dE2-deuteron in question and $L_{p,d}$ was its energy loss. By differentiating the expressions for E3-protons and dE2-deuterons and then dividing the resulting equations, the following expression was obtained:

$$\frac{dT'_p}{dT'_d} = \frac{dT_p}{dT_d} \cdot \frac{1 - \frac{dL_p}{dT_p}}{1 - \frac{dL_d}{dT_d}}. \quad (2)$$

In this expression, the quotient $\frac{dT_p}{dT_d}$ is a kinematic factor that is completely dominated by the relative masses of the proton and deuteron. For energies well away from reaction threshold, it is almost invariant with respect to photon energy. While the loss functions are strongly dependent upon energy, their ratio is not.

Figure 5 shows E3-proton energy plotted against dE2-deuteron energy GEANT4-simulated events (left panel) and for data (right panel). Coincident events lie in a well-defined linear band. The slope of this band is related to the ratio of the gains in the detectors (recall Eq. 2). Using the gain in the dE2 detector determined using the punch-through method, data were simulated using GEANT4 varying the gain in the E3 detector until the slope in the simulated scatter plot was equal to the slope in the data scatter plot. When the slopes in the two scatter plots were equal, the gain in the E3 detector had been determined.

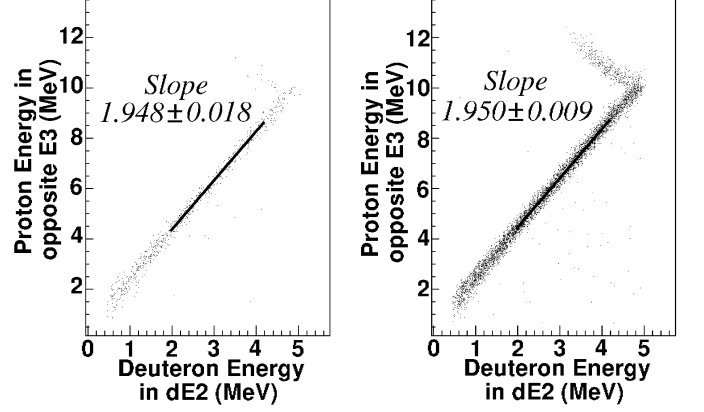


FIG. 5: An illustration of the calibration of an E3 detector. Each panel shows E3-protons plotted against dE2-deuterons. The left panel shows GEANT4-simulated events for an E3 gain which resulted in the slopes in the distributions being equal, while the right panel shows data. When the slopes in the two scatter plots were equal, the gain in the E3 detector had been determined. See text for details.

A distinct advantage to performing the energy calibration of the E3 detector using this method is that it is not as sensitive to uncertainties in the energy-loss functions or detector geometries and thicknesses. The uncertainty in $\frac{dT'_p}{dT'_d}$ was determined to be 1%.

Uncertainties in the energy-calibration procedure resulted in a systematic uncertainty in the knowledge of the photon energies corresponding to each tagger channel of about 200 keV. This contributed a 1.5% uncertainty to the measured cross section.

B. Particle identification (PID)

Charged reaction products were identified by their energy loss in the ΔE detectors. Because the detector telescopes used for this experiment each consisted of three detector elements, two different combinations of elements could be used for energy-based PID. For low-energy particles, dE1 versus (dE1+dE2) scatter plots were filled; and for high-energy particles, dE2 versus (dE2+E3) scatter plots were filled. This provided high-quality particle identification over the entire range of particle energies available to this experiment. A typical scatter plot is shown in Fig. 6, where a clear separation between protons and deuterons may be observed. The detection efficiency for both protons and deuterons in the silicon detectors was 100%.

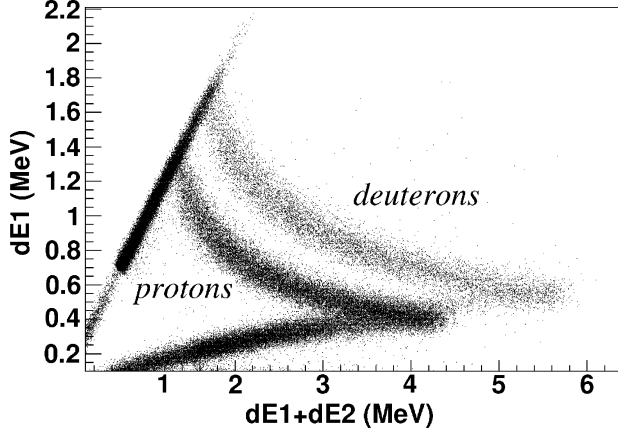


FIG. 6: An energy-loss scatter plot showing the detector-element combination $dE1$ versus $(dE1+dE2)$. Both the proton band and the deuteron band may be easily identified. Higher energy “punch-through” or “back-bending” events were analyzed in more detail in $dE2$ versus $(dE2+E3)$ scatter plots. See text for details.

C. Background subtraction

Timing information from the tagger was used to establish coincidences between the protons and deuterons in the silicon detectors and post-bremsstrahlung electrons in the focal-plane detectors. Fig. 7 shows a typical timing distribution for a 3.25 MeV wide photon-energy bin. In this distribution, the shaded prompt region contains an easily identified coincidence peak superimposed on top of a random background. The function fitted to this spectrum consisted of Gaussian superimposed upon a constant random background to the left of the timing peak (the timing region where “stolen coincidences” [16, 17] may occur – see below) and a decaying exponential to the right of the timing peak (the cross-hatched timing region where the coincidences are truly random). A FWHM-timing resolution of 3.8 ns was obtained. In order to separate the true coincidences from the random coincidences, a cut (indicated by the vertical bars) was placed on the prompt peak and to the right of the prompt peak (indicated by the fitted region) and two “missing-energy” spectra were filled.

The missing energy E_{miss} was defined as

$$E_{\text{miss}} = T_d(E_\gamma) - L_d(E_\gamma) - E_{\text{total}}, \quad (3)$$

where $T_d(E_\gamma)$ was the kinetic energy of the deuteron at the reaction vertex and $L_d(E_\gamma)$ was the energy loss experienced in the gas and in the target-window foils by the deuteron. E_{total} was the (total) detected energy in a given telescope. Note that the term $T_d(E_\gamma) - L_d(E_\gamma)$ was not only a function of photon energy but also of the deuteron emission angle. The GEANT4 simulation was used to determine the average value of this

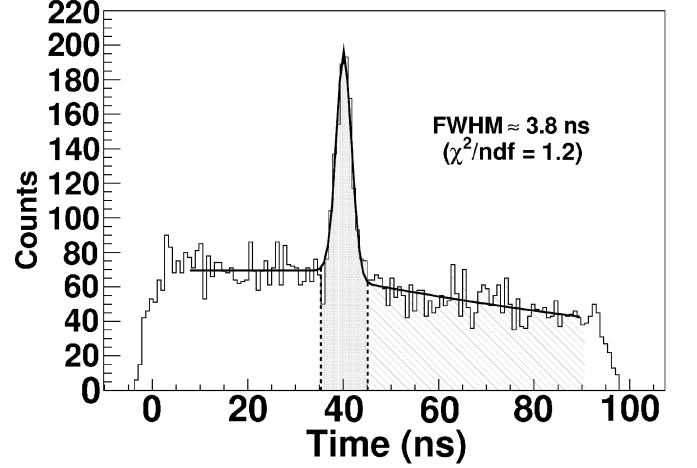


FIG. 7: A TDC spectrum corresponding to a photon-energy bin of 3.25 MeV demonstrating coincidences between post-bremsstrahlung electrons in the tagger focal plane and charged particles in the silicon detectors. This spectrum has been subjected to a missing energy cut to improve the signal-to-noise ratio. A FWHM timing resolution of 3.8 ns was obtained. See text for details.

term for each focal-plane detector. In this manner, true tagged deuteron events were localized to a peak at $E_{\text{miss}} = 0$ MeV, whereas random events populated a much larger range. Figure 8 shows the prompt and normalized random E_{miss} spectra corresponding to the TDC spectrum shown in Fig. 7. Based upon the assumption that the shape of the E_{miss} spectrum for random events within the prompt region was the same as that for events from the purely random region, the normalization was determined by requiring the number of events outside the peak region to be the same in the prompt E_{miss} spectrum and the normalized random E_{miss} spectrum.

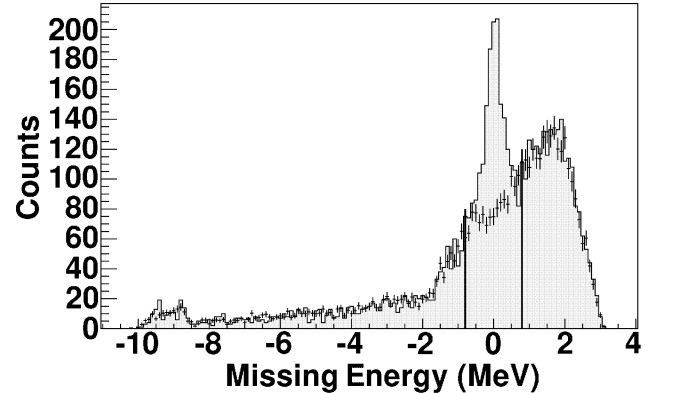


FIG. 8: A prompt (both true tagged and random events) E_{miss} spectrum together with a normalized purely random E_{miss} spectrum. The vertical bars indicate the region where true tagged events appeared. See text for details.

The top panel of Fig. 9 shows the difference between the prompt and normalized random spectra shown in Fig. 8. Away from the peak region at $E_{\text{miss}} = 0$ MeV, the data are flat as a function of energy and statistically consistent with zero. This confirms the validity of the method used for the background subtraction. In the bottom panel of Fig. 9, a Gaussian distribution was fitted to the data in the vicinity of $E_{\text{miss}} = 0$ MeV. The fitted function provided a constraint on the energy region over which the data were summed bin by bin to determine the measured yield.

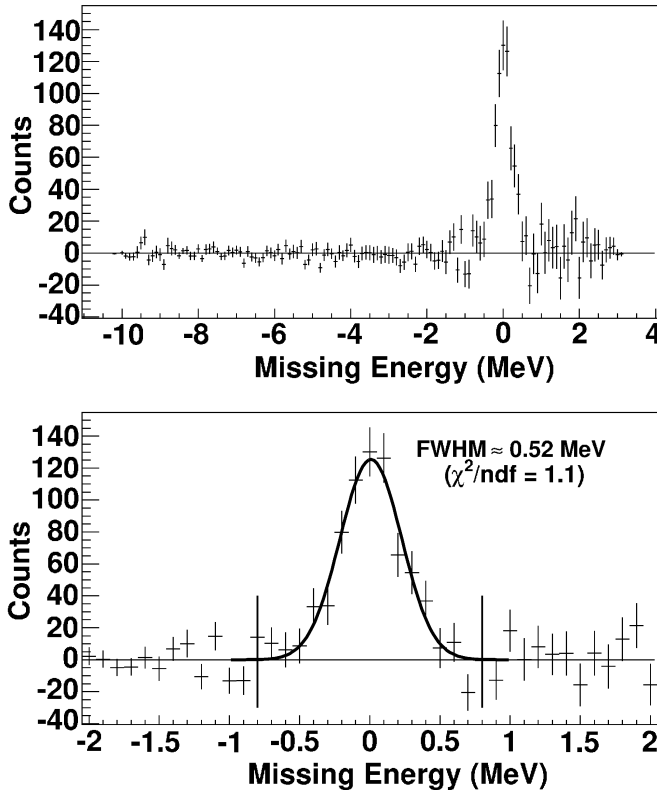


FIG. 9: Top panel: the difference between the prompt and normalized random spectra shown in Fig. 8. Away from the clearly visible peak, the data are structureless and statistically consistent with zero. Bottom panel: a Gaussian distribution has been fitted to the peak to determine the FWHM energy resolution as well as the region over which the peak data were integrated. See text for details.

Stolen coincidences occurred when an uncorrelated (random) post-bremsstrahlung electron stopped the focal-plane TDCs prior to a (true) post-bremsstrahlung electron correlated in time with a charged-particle event. A correction was applied to account for these events, which would otherwise have been missed. Due to the very high event rates observed in this experiment (from 2 to 5 MHz), this correction to the yield ranged from 6% to 28%. A detailed discussion of the correction is presented in Ref. [10].

An identical analysis was performed on the empty-target data and demonstrated that there was no measurable contribution to the full-target spectra.

D. Cross Section

The laboratory differential cross section for the reaction $\gamma + {}^3\text{He} \rightarrow \text{d} + \text{p}$ for each photon energy bin was extracted using

$$\frac{d\sigma}{d\Omega}(E_\gamma) = \frac{Y_{d,p}(E_\gamma)}{N_\gamma(E_\gamma) \cdot \rho \cdot \Delta\Omega \cdot l}, \quad (4)$$

where $Y_{d,p}(E_\gamma)$ was either the true deuteron or true proton yield corrected for stolen coincidences and electronic deadtime effects; $N_\gamma(E_\gamma)$ was the total number of photons for a given photon-energy bin given by the product of the tagging efficiency and the number of electrons registered in the corresponding focal-plane scalers and corrected for electronic deadtime effects; ρ was the target density (recall Sec. II B); and $\Delta\Omega$ was the effective solid angle for an extended target of length l . The cross section was evaluated separately for each focal-plane detector and subsequently binned.

1. Yield

The yield of true deuteron events corrected for electronic deadtime effects was used to determine the cross section. However, in a measurement of the $\gamma + {}^3\text{He} \rightarrow \text{d} + \text{p}$ reaction where the photon energy is known, a measurement of the kinetic energy of the proton with a sufficiently high energy resolution together with knowledge of the proton angle allows for unambiguous identification of the two-body breakup (2bbu) channel. As this work was performed using tagged photons and the energy resolution was sufficiently high (approximately 0.5 MeV, see Fig. 10), the over-determined kinematic situation arose, and protons from the photodisintegration of ${}^3\text{He}$ were also used to identify 2bbu events [32].

In the final cross-section results, events from as many as twelve focal-plane detectors were combined into a single photon-energy bin, taking into account both the variation in the tagged-photon flux as well as the energy-dependence of the cross section. The systematic uncertainty associated with particle identification and yield determination was $<1\%$.

2. Number of photons

The procedure used for obtaining the number of photons incident on the target is presented in detail in Ref. [11]. The incident photon flux for each photon-energy bin was determined by counting the number of recoil electrons in the tagger focal plane and correcting the result

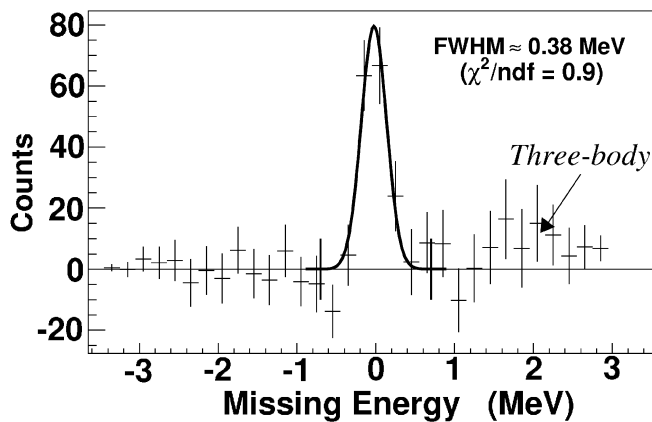


FIG. 10: An E_{miss} spectrum for events identified as protons. 2bbu protons are clearly confined to a peak at zero missing energy, whereas 3bbu channel protons necessarily have $E_{\text{miss}} > 1.5$ MeV. The energy resolution was thus sufficient to separate 2bbu protons from 3bbu protons and thus allow the cross section to be investigated in a complementary manner via the 2bbu proton events.

for electronic deadtime and the measured tagging efficiency, which was on average 18%. Attenuation of photon flux due to atomic processes within a 9 cm diameter liquid ^4He target was thoroughly investigated and shown to be negligible in Ref. [18]. It was thus also concluded to be negligible for the 6 cm long gaseous ^3He target used in this experiment.

3. Acceptance

Due to the use of an extended target, no simple analytical expression for the solid angle subtended by the silicon detectors could be employed. Instead, the GEANT4 Monte-Carlo simulation of the setup was used to quantify the acceptance.

The geometrical acceptance as a function of photon energy was evaluated by examining the ratio of the number of detected events (N_{detected}) to the number of generated events ($N_{\text{generated}}$). The number of detected events was determined by applying the same cuts to the pseudodata that were used for the analysis of real data. In this manner, the effective solid angle was given by

$$\Delta\Omega = \frac{4\pi \cdot N_{\text{detected}}}{N_{\text{generated}} \cdot w(\theta = 90^\circ)}, \quad (5)$$

where $w(\theta = 90^\circ)$ were the LAB angular distributions at LAB angle θ provided by Schadow *et al.* (see Sec. IV). The effective solid angle as a function of focal-plane detector (photon energy) evaluated for the 6 cm extended target thickness is shown in Fig. 11.

The systematic uncertainty in the effective solid angle was dominated by the positioning of the target chamber

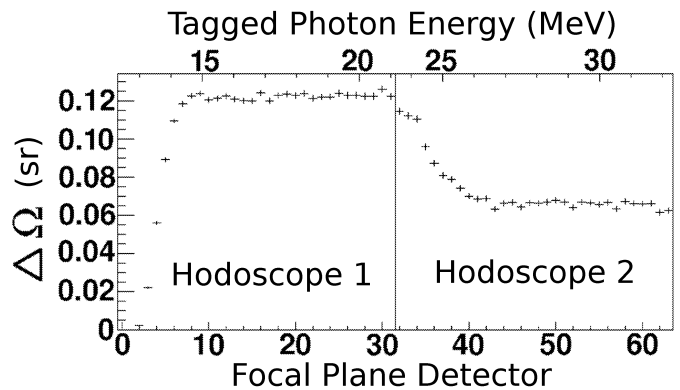


FIG. 11: The effective solid angle $\Delta\Omega$ as a function of focal-plane detector (photon energy) evaluated for the 6 cm extended target thickness. The steep increase in effective solid angle up to 15 MeV was due to threshold effects in the PID process. The decrease in effective solid angle which occurs between 20 and 25 MeV was a consequence of the collimators located between the dE2 and E3 silicon detectors.

and the uncertainty in the locations of the collimators. Simulation demonstrated that an 8 mm mispositioning of the target chamber (and thus an offset of the photon-beam trajectory with respect to the locations of the detector telescopes) introduced a significant skewing of the yields in the four telescopes together with only a 3.5% overall reduction. Since this skewing of the yields was not observed, it was concluded that the target chamber was positioned correctly. Simulation also demonstrated that the uncertainty in the locations of the collimators resulted in an uncertainty in the effective solid angle of 2%.

4. Systematic uncertainties

The systematic uncertainty in the measurement was dominated by the systematic uncertainty in the determination of the number of photons, which ranged from 4% at $E_\gamma = 31.2$ MeV to 14% at $E_\gamma = 14.0$ MeV. A summary of the systematic uncertainties is presented in Table I. The systematic uncertainties associated with each of the individual cross-section data points are presented in Table II. See also the uncertainty bands shown in Figs. 12 and 13.

The systematic uncertainty associated with the target cell and detector telescopes used in this experiment was carefully studied in a previous measurement of the tagged two-body photodisintegration of ^3He performed at SAL [19] by measuring the $^2\text{H}(\gamma, p)n$ total cross section in 1 MeV bins from $18 < E_\gamma < 39$ MeV using the exact same target cell and detector telescopes. Agreement between these SAL data and those of Bernabei *et al.* [20] was excellent. Further, as the agreement between our ^3He data and these SAL ^3He data is also excellent,

TABLE I: A summary of the systematic uncertainties in the cross-section data.

quantity	uncertainty
tagging efficiency (scale)	4%
tagging efficiency (<rate dependent>)	5%
geometrical acceptance	2%
target density	2%
particle misidentification	<1%
particle-detection efficiency	<1%
photon-beam attenuation	<1%

TABLE II: A summary of the laboratory differential cross-section data for the ${}^3\text{He}(\gamma, d)$ reaction measured at $\theta^{\text{LAB}} = 90^\circ$. The first uncertainty is statistical and the second uncertainty is systematic. See also Figs. 12 and 13.

E_γ (MeV)	$\frac{d\sigma}{d\Omega}(\theta^{\text{LAB}} = 90^\circ)$ ($\mu\text{b/sr}$)
14.0	$85.0 \pm 5.3 \pm 7.2$
14.9	$94.4 \pm 7.6 \pm 9.4$
15.7	$82.3 \pm 3.3 \pm 7.2$
16.7	$77.0 \pm 8.2 \pm 7.7$
17.7	$71.4 \pm 2.8 \pm 6.4$
19.9	$59.0 \pm 1.8 \pm 3.2$
24.0	$47.8 \pm 2.6 \pm 2.4$
25.6	$42.0 \pm 2.7 \pm 2.1$
26.2	$41.3 \pm 1.8 \pm 1.7$
28.8	$34.3 \pm 1.6 \pm 1.1$
31.2	$28.1 \pm 1.3 \pm 0.9$

we conclude that we have a very good understanding of our systematic uncertainties.

IV. RESULTS AND DISCUSSION

In this section, we present our results for the laboratory differential cross section obtained in this measurement for the ${}^3\text{He}(\gamma, d)$ reaction at $\theta^{\text{LAB}} = 90^\circ$, and we compare these results to previous data and calculations. The differential cross-section data are summarized in Table II.

A. The calculations

Both the calculations of Skibiński *et al.* [8] and Deltuva *et al.* [9] to which we compare our data employed the Faddeev technique. Further, they both include final-state interactions. The authors chose different nuclear potentials and treated the two-body nuclear-current operator differently. Further, their treatments of the Coulomb interaction were not the same. Skibiński *et al.* considered it only in the bound state and not in the continuum. This is believed to increase the predicted cross section for energies close to threshold, with a negligible effect above 15 MeV [21]. Deltuva *et al.* included the Coulomb inter-

action in both the bound and the scattering state. This was accomplished using the screening and renormalization approach described in detail in Ref. [9].

In order to isolate 3NF effects, Skibiński *et al.* calculated the cross section using the NN potential AV18 both with and without the explicit inclusion of the Urbana IX 3NF. The two-body nuclear-current operator was included using the Siegert theorem [22, 23, 24]. The authors found that the binding energy of ${}^3\text{He}$ decreased from -6.92 MeV (AV18 alone) to -7.74 MeV with the inclusion of the Urbana IX 3NF, in good agreement with the experimental value of -7.72 MeV.

Deltuva *et al.* used the CD-Bonn NN potential together with the coupled-channel CD-Bonn+ Δ . The authors claim that the inclusion of the Δ -isobar corresponds to the implicit inclusion of a 3NF. The Siegert theorem, together with explicit inclusion of one and two-body currents not accounted for by the theorem, was used for the two-body nuclear-current operator. Despite the inclusion of the non-Siegert terms, current conservation is not fulfilled. The predictions are essentially insensitive to the inclusion of 3NF effects. These authors found that the binding energy of ${}^3\text{He}$ decreased from -7.26 MeV (CD-Bonn alone) to -7.54 MeV with the inclusion of the Δ , somewhat higher than the experimental value of -7.72 MeV.

B. Comparison to previous data

Figure 12 shows the laboratory differential cross-section data obtained in this measurement for the ${}^3\text{He}(\gamma, d)$ reaction at $\theta^{\text{LAB}} = 90^\circ$ (solid black squares) compared to previous results. In every case, error bars are the statistical uncertainties, while the systematic uncertainty in this measurement is represented by the bands at the bases of the panels. The top panel presents a comparison of our tagged-photon data to previous bremsstrahlung (γ, d) measurements [1, 2, 4]; the middle panel presents a comparison to a previous (p, γ) measurement [6]; and the bottom panel presents a comparison to previous (e, d) measurements [3, 5] which have been converted to the real-photon point using “virtual-photon theory” – see the aforementioned Refs. for details. For readability, only selected error bars have been plotted on the Kundu *et al.* data. Further, note that while the Stewart *et al.*, Ticcioni *et al.*, and Kundu *et al.* data sets all extend above 35 MeV, these higher-energy data are not shown here.

It is clear that the previous data all agree reasonably well with the present results. The bremsstrahlung (γ, d) measurements shown in the top panel all fall systematically slightly below our tagged-photon results. We note that Berman *et al.*, Stewart *et al.*, and Ticcioni *et al.* claim systematic uncertainties of 6, 10, and 6%, respectively. The (p, γ) measurement seems to “mesh” with our data, especially when systematic uncertainties are considered. Skopik *et al.* claim a systematic uncertainty

of 10%. However, in the vicinity of 15 MeV, no general trend is readily apparent, and our data do not extend low enough in energy to draw general conclusions [33]. The scatter in the electrodisintegration data expressed at the real-photon point shown in the bottom panel is the largest, and we note that the photon-energy dependence of these two (e, d) measurements is very different. This may be due to normalization issues with one or both measurements, or the inaccuracy of virtual-photon theory for photon energies significantly lower than the endpoint of the bremsstrahlung spectrum, as suggested by Chang *et al.* in Ref. [5]. In the energy region below 15 MeV, the Kundu *et al.* cross section rises slowly with decreasing photon energy, perhaps reaching a maximum at around 13 MeV and “turning over” at lower photon energies. This is in contrast to the Chang *et al.* results which rise sharply. Thus, the aforementioned disagreement between the electrodisintegration data sets is not just due to systematic scaling. The Kundu *et al.* data agree with ours for $E_\gamma > 25$ MeV, while the Chang *et al.* data agree with ours for $E_\gamma < 20$ MeV. We note that Kundu *et al.* and Chang *et al.* claim systematic uncertainties of 15% and 6%, respectively.

Figure 13 shows the laboratory differential cross section obtained in this measurement for the $^3\text{He}(\gamma, d)$ reaction at $\theta^{\text{LAB}} = 90^\circ$ (solid black squares) compared to the previously discussed theoretical predictions. Again, error bars are the statistical uncertainties, while the systematic uncertainty is represented by the bands at the bases of the panels. The top panel presents a comparison to the predictions of Skibiński *et al.*, while the bottom panel presents a comparison to the predictions of Deltuva *et al.*

Both calculations do a reasonable job of predicting the present results over the energy range of the experiment. That said, the improved accuracy and precision of the present data may be exploited to distinguish between the four cases presented in Fig. 13. As shown in the top panel, within the calculational framework of Skibiński *et al.*, our data favor the inclusion of 3NF. As shown in the bottom panel, within the calculational framework of Deltuva *et al.*, no conclusions regarding the inclusion of 3NF may be drawn, as the calculational sensitivity is very small. We thus see that at all energies, including those above 23 MeV where our systematic uncertainties are the smallest (roughly 5%), the present data favor the calculation of Skibiński *et al.* that includes 3NF.

V. SUMMARY AND CONCLUSIONS

In summary, the differential cross section for the two-body photodisintegration of ^3He has been measured at $\theta^{\text{LAB}} = 90^\circ$ using tagged photons in the energy range 14 – 31 MeV, and the cross-section data have been compared to the results of other available measurements and theoretical calculations.

Most of the previous data sets agree reasonably well with the present results. The previous bremsstrahlung

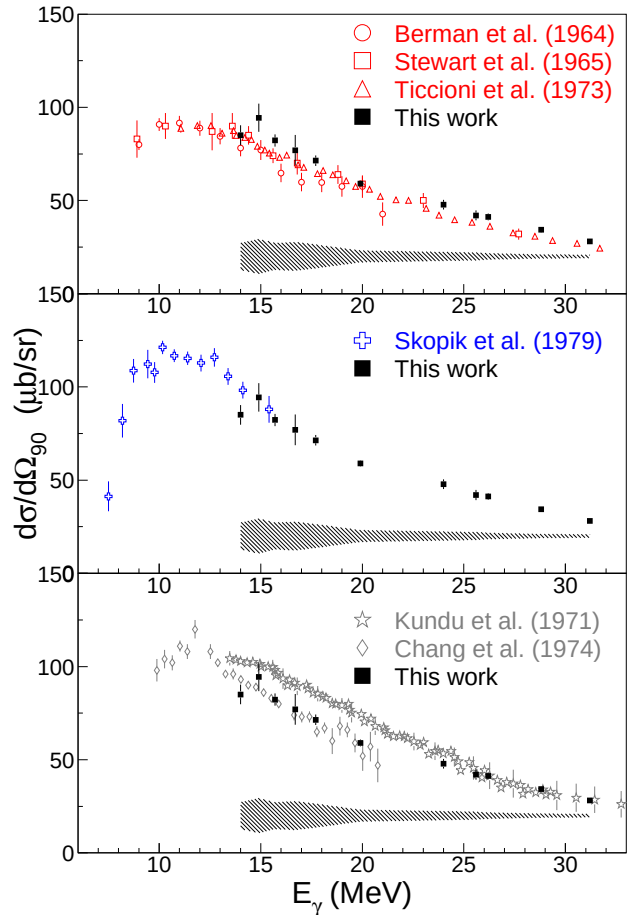


FIG. 12: (Color online) The laboratory differential cross section obtained in this measurement for the $^3\text{He}(\gamma, d)$ reaction at $\theta^{\text{LAB}} = 90^\circ$ (solid black squares) compared to previous results. In every case, error bars are the statistical uncertainties, while the systematic uncertainty in this measurement is represented by the bands at the base of the panels. The top panel presents a comparison of our tagged-photon data to previous (γ, d) measurements; the middle panel presents a comparison to a previous (p, γ) measurement; and the bottom panel presents a comparison to previous (e, d) measurements which have been expressed at the real-photon point. See text for details.

(γ, d) measurements [1, 2, 4] all report differential cross sections which are systematically smaller than our cross section. The previous (p, γ) measurement [6] agrees reasonably well with our results in the limited region of overlap. However, this region of overlap is so small that it is difficult to draw general conclusions. The reported electrodisintegration cross sections expressed at the real-photon point [3, 5] are generally larger than our cross section. That said, there appears to be a disagreement between these two data sets which is not simply due to systematic scaling, as they represent completely different excitation functions. This disagreement may be

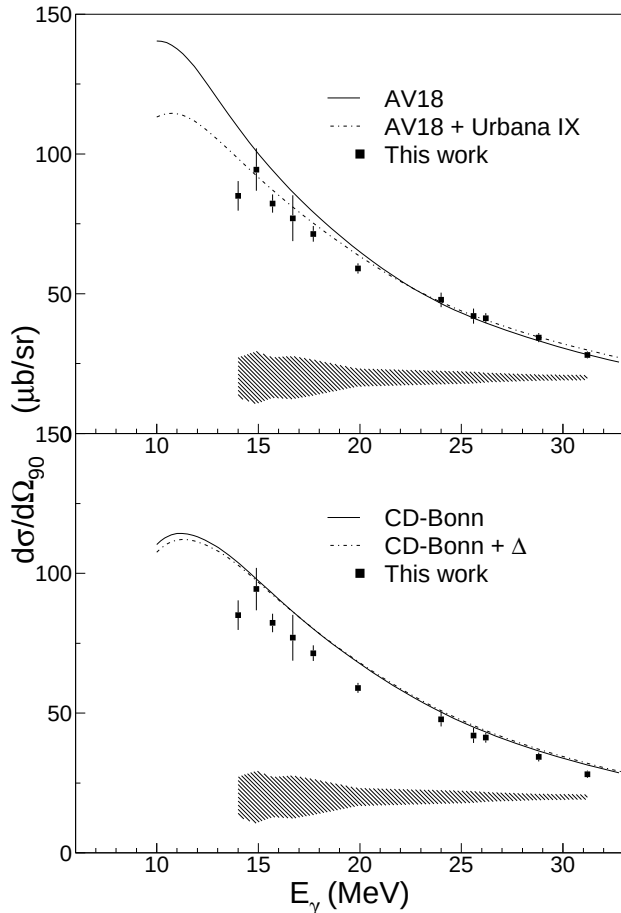


FIG. 13: The laboratory differential cross section obtained in this measurement for the ${}^3\text{He}(\gamma, d)$ reaction at $\theta^{\text{LAB}} = 90^\circ$ (solid black squares) compared to theoretical predictions. Error bars are the statistical uncertainties, while the systematic uncertainty is represented by the bands at the base of the panels. The top panel presents a comparison to the predictions of Skibiński *et al.*, while the bottom panel presents a comparison to the predictions of Deltuva *et al.* See text for details.

rooted in the inaccuracy of virtual-photon theory for photon energies significantly lower than the endpoint of the bremsstrahlung spectrum.

Theoretical predictions based upon Faddeev calculations using realistic potentials and which take into account 3NF and FSI compare favorably with our tagged-photon data, especially considering systematic uncertainties. Our data, the previous data for the ${}^3\text{He}(\gamma, d)$ reaction [1, 2, 4], and the previous data for the (p, γ) reaction [6] favor the calculational framework of Skibiński *et al.* [8] with the inclusion of 3NF. Clearly, photodisintegration studies of the three-nucleon system should be continued at photon energies below 20 MeV as well as above 70 MeV where the calculations of Skibiński *et al.* [25] show an enhanced sensitivity to 3NF effects.

We direct the interested reader to Refs. [26, 27, 28] for an overview of a newly commenced program of experiments at the recently upgraded Tagged-Photon Facility at MAX-lab. This program consists of a systematic investigation of the photodisintegration of ${}^3, {}^4\text{He}$ using tagged photons and a novel gas-scintillator active target developed at the University of Glasgow, UK to detect heavy charged recoil fragments down to the reaction threshold in combination with standard external detectors to detect ejected neutrons, protons, and deuterons, as well as scattered photons.

Acknowledgments

The authors acknowledge the outstanding support of the MAX-lab staff which made this experiment successful. The Lund group acknowledges the financial support of the Swedish Research Council, the Knut and Alice Wallenberg Foundation, the Crafoord Foundation, the Swedish Institute, the Wenner-Gren Foundation, and the Royal Swedish Academy of Sciences. This work was sponsored in part by the U.S. Department of Energy under grants DE-FG02-95ER40901 and DE-FG02-99ER41110. Partial support was also provided by Jefferson Lab via the Southeastern Universities Research Association under U.S. Department of Energy grant DE-AC05-84ER40150. We thank R. Skibiński and A. Deltuva for sharing their calculations with us and for general guidance. We thank H. Griesshammer for constructive suggestions. We dedicate this work to the memory of our colleague A. A. Kotov.

-
- [1] B. L. Berman, L. J. Koester Jr., and J. H. Smith, Phys. Rev. **133**, B117 (1964).
 - [2] J. R. Stewart, R. C. Morrison, and J. S. O'Connell, Phys. Rev. **138**, B372 (1965).
 - [3] S. K. Kundu, Y. M. Shin, and G. D. Wait, Nucl. Phys. **A171**, 384 (1971).
 - [4] G. Ticcioni, S. N. Gardiner, J. L. Matthews, and R. O. Owens, Phys. Lett. **46B**, 369 (1973).
 - [5] C. C. Chang, W. R. Dodge, and J. J. Murphy, Phys. Rev. **C9**, 1300 (1974).
 - [6] D. M. Skopik, H. R. Weller, N. R. Roberson, and S. A. Wender, Phys. Rev. **C19**, 601 (1979).
 - [7] D. D. Faul, B. L. Berman, P. Meyer, and D. L. Olson, Phys. Rev. **C24**, 849 (1981).
 - [8] R. Skibiński, J. Golaka, H. Kamada, H. Witała, W. Glöckle, and A. Nogga, Phys. Rev. **C67**, 054001 (2003).
 - [9] A. Deltuva, A. C. Fonseca, and P. U. Sauer, Phys. Rev.

- C71**, 054005 (2005).
- [10] M. Karlsson (2005), Ph.D. Thesis, University of Lund, Sweden, unpublished; see also <http://www.maxlab.lu.se/kfoto/publications/karlsson.pdf>.
 - [11] J.-O. Adler, B.-E. Andersson, K. I. Blomqvist, K. Hansen, L. Isaksson, B. Nilsson, D. Nilsson, H. Ruijter, A. Sandell, B. Schröder, et al., Nucl. Inst. and Meth. **A388**, 17 (1997).
 - [12] <http://www.maxlab.lu.se/>.
 - [13] J.-O. Adler, B.-E. Andersson, K. I. Blomqvist, B. Forkman, K. Hansen, L. Isaksson, K. Lindgren, D. Nilsson, A. Sandell, B. Schröder, et al., Nucl. Instrum. Methods Phys. Res. Sect. A **294**, 15 (1990).
 - [14] S. Agostinelli et al., Nucl. Inst. and Meth. **A506**, 250 (2003).
 - [15] <http://root.cern.ch/>.
 - [16] R. O. Owens, Nucl. Instrum. Methods Phys. Res. Sect. A **288**, 574 (1990).
 - [17] D. Hornidge (2003), Ph.D. Thesis, University of Saskatchewan, Canada, unpublished; see also http://www.mta.ca/~dhornidg/hornidge_phd.pdf.
 - [18] B. Nilsson, J.-O. Adler, B.-E. Andersson, J. R. M. Annand, I. Akkurt, M. J. Boland, G. I. Crawford, K. G. Fissum, K. Hansen, P. D. Harty, et al., Phys. Rev. **C75**, 014007 (2007).
 - [19] G. V. O'Rielly, G. Feldman, J. R. Calarco, M. Karlsson, B. L. Berman, W. J. Briscoe, R. Igarashi, N. R. Kolb, R. E. Pywell, and D. M. Skopik, to be submitted to Physical Review C in 2009.
 - [20] R. Bernabei, A. Incicchitti, M. Mattioli, P. Picozza, D. Prosperi, L. Casano, S. d'Angelo, M. P. De Pascale, C. Schaerf, G. Giordano, et al., Phys. Rev. Lett. **57**, 1542 (1986).
 - [21] J. Golak, R. Skibiński, W. Glöckle, H. Kamada, A. Nogga, H. Witała, V. D. Efros, W. Leidemann, G. Orlandini, and E. L. Tomusiak, Nucl. Phys. **A707**, 365 (2002).
 - [22] A. J. F. Siegert, Phys. Rev. **52**, 787 (1937).
 - [23] R. G. Sachs and N. Austern, Phys. Rev. **81**, 705 (1951).
 - [24] J. L. Friar and S. Fallieros, Phys. Rev. **C29**, 1645 (1984).
 - [25] R. Skibiński, J. Golak, Witała, W. Glöckle, H. Kamada, and A. Nogga, Phys. Rev. **C67**, 054002 (2003).
 - [26] J.R. M. Annand et al. (2004), Measurement of Photoreactions on Helium Isotopes Using Gas-Scintillator Active Targets, unpublished; see also <http://www.maxlab.lu.se/kfoto/ExperimentalProgram/PAC/2004/>.
 - [27] K. G. Fissum et al. (2008), MAX-lab Nuclear Physics Run Period Report #18, unpublished; see also <http://www.maxlab.lu.se/kfoto/ExperimentalProgram/runperiod>.
 - [28] K. G. Fissum et al. (2009), MAX-lab Nuclear Physics Run Period Report #21, unpublished; see also <http://www.maxlab.lu.se/kfoto/ExperimentalProgram/runperiod>.
 - [29] W. Schadow, O. Nohadani, and W. Sandhas, Phys. Rev. **C63**, 044006 (2001).
 - [30] W. Schadow (2001), private communication.
 - [31] A. A. Kotov, Nucl. Instrum. Methods Phys. Res. Sect. A **423**, 376 (1999).
 - [32] The differential cross section calculated using the proton yield was thus measured at $\theta_p = 90^\circ$. At the photon energies employed here, this corresponds to the deuteron being ejected at about $\theta_d \approx 82^\circ$. Angular distributions provided by Schadow *et al.* [29, 30] were thus employed to transform the cross section measured at $\theta_p = 90^\circ$ to the cross section at $\theta_d = 90^\circ$ using the relation $\frac{d\sigma}{d\Omega}(\theta_d = 90^\circ) = \frac{d\sigma}{d\Omega}(\theta_p = 90^\circ) \cdot \frac{w[\theta_d = 90^\circ]}{w[\theta_d(\theta_p = 90^\circ)]}$, where the function $\theta_d(\theta_p = 90^\circ)$ was the angle of the deuteron corresponding to a proton angle of 90° . Typical values of the factor $w[\theta_d = 90^\circ]/w[\theta_d(\theta_p = 90^\circ)]$ were in the range 1.03 to 1.10.
 - [33] The present measurement actually consisted of two complementary detector setups which extended over a large photon-energy range. The results obtained using the setup detailed in this paper constituted the higher tagged-photon energy region. These data were acquired to overlap with the previously mentioned SAL [19] measurement. A second detector setup consisting of a Bragg/PPAC chamber [31] was employed to investigate lower tagged-photon energies extending down to at least 12 MeV (worst-case scenario). These data were being analyzed by our colleague A. A. Kotov at the time of his death, and are not ready for publication.